


**GROUND FLOOR PLAN FOR MASJID AT BIHAR**

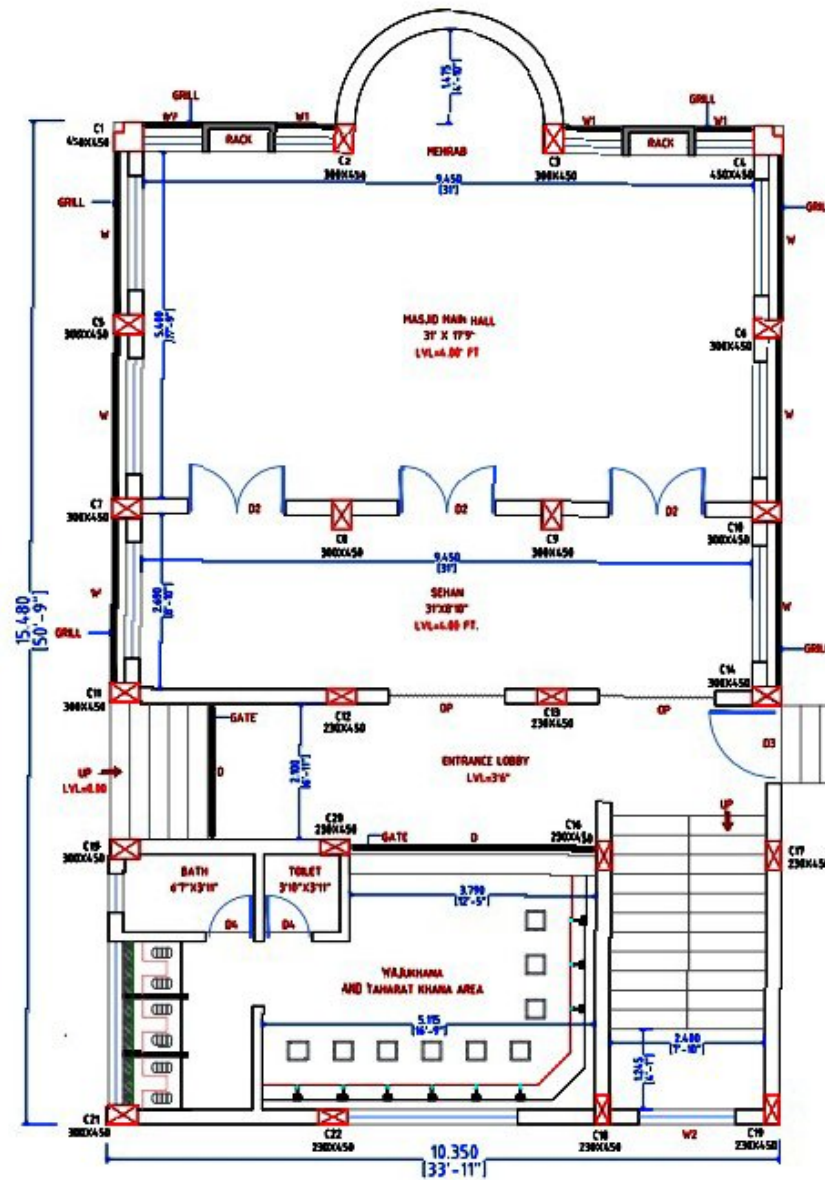

**GROUND FLOOR PLAN FOR MASJID E SHER-E-NEPAL**

#### NOTES :

1. DIMENSIONS AND LEVELS AS SHOWN TO BE VERIFIED AT SITE BEFORE STARTING THE WORK ON SITE.
2. NO CHANGES ON SITE OR IN DRAWINGS SHOULD BE DONE UNLESS INFORMED TO THE RESPECTIVE ARCHITECT APPOINTED ON SITE.
3. ENGINEER / ARCHITECT WILL NOT BE RESPONSIBLE FOR TAKING ANY KIND OF MUNICIPAL CORPORATION APPROVAL OR BUILDING PERMISSION FOR EXECUTION OF WORK ON THIS SITE. IN CASE OF ANY ACTION BY THE AUTHORITIES IN FUTURE, IT WILL BE FULLY THE OWNER'S RESPONSIBILITY TO HANDLE THE MATTER.

SRL NO.	REV. NO.	DATE	REMARK



#### PROJECT :

PROPOSED MASJID E SHER E-NEPAL

SITE LOCATION: JAYNAGAR, BHAR, IN

#### PROJECT DETAILS :

PROJECT NUMBER		AS_AP_09
DRAWING		AS_AP_09_FP
DATE		06.11.2024
DRAWING TITLE		FLOOR PLAN
DRAWN BY	CHECKED BY	SCALE
--	--	NTS




**A.S. ARCHITECTS, INTERIOR DESIGNERS & 3D STUDIO,**

ADD: REHMATNAGAR, SANGAMNER,  
DIST. AHMEDNAGAR. PIN- 422605.

# COLUMN AND FOOTING DETAILS FOR MASJID E SHER-E-NEPAL

## DETAILS OF COLUMNS & FOOTINGS

COLUMN NO	COLUMN SIZE & STEEL UP TO PLINTH LEVEL	COLUMN SIZE & STEEL UP TO 1ST SLAB	COLUMN SIZE & STEEL UP TO 2ND SLAB	EXCAVATION SIZE	FOOTING SIZE & TYPE OF FOOTING	D & d	STEEL ALONG SHORT SPAN	STEEL ALONG LONG SPAN
C1,C4	450X450 9,12# Double Ring- 8mm@150c/c	300X450 8,12# Double Ring- 8mm@150c/c		1700 x 1800	1400 x1500 BOX FOOTING	D = 450	10mm@ 170c/c	10mm@ 170c/c
							See Detail 1	
C2,C3,C5,C6,C7, C10,C11,C14,C15,C21	300X450 4,16#+4,12# Ring-8mm@150c/c	300X450 4,16#+4,12# Ring-8mm@150c/c		1500 x1800	1200 x1500 BOX FOOTING	D = 400	10mm@ 175c/c	10mm@ 175c/c
							See Detail 1	
C8,C9	300X450 4,16#+4,12# Ring-8mm@150c/c	300X450 4,16#+4,12# Ring-8mm@150c/c		1500 x1800	1200 x1500 BOX FOOTING	D = 400	10mm@ 175c/c	10mm@ 175c/c
							See Detail 1	
C12,C13,C16, C17,C18,C19,C20,C22	230X450 8,12# Double Ring- 8mm@150c/c	230X450 8,12# Double Ring- 8mm@150c/c		1400 x 1700	1100 x1400 BOX FOOTING	D = 400	8mm@ 125c/c	8mm@ 150c/c
							See Detail 1	

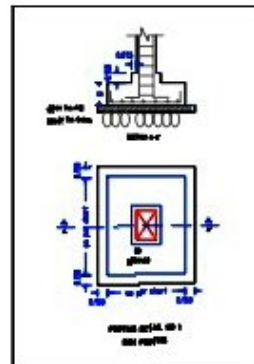

## NOTES :

1. DIMENSIONS AND LEVELS AS SHOWN TO BE VERIFIED AT SITE BEFORE STARTING THE WORK ON SITE.
2. NO CHANGES ON SITE OR IN DRAWINGS SHOULD BE DONE UNLESS INFORMED TO THE RESPECTIVE ARCHITECT APPOINTED ON SITE.

SERIAL NO.	REV. NO.	DATE	REMARK

## PROJECT :

PROPOSED MASJID E SHER-E-NEPAL.

SITE LOCATION: JAYNAGAR, BHAR, IN


## PROJECT DETAILS :

PROJECT NUMBER	AS_AP_09
DRAWING	AS_AP_09_RCC_CFD
DATE	05.11.2024
DRAWING TITLE	COLUMNS, FOOTING DETAILS
DRAWN BY	CHECKED BY
---	---
SCALE	NTS



A.S. ARCHITECTS, INTERIOR DESIGNERS & 3D STUDIO,

ADD: REHMATNAGAR, SANGAMNER,  
DIST. AHMEDNAGAR PIN- 422604.

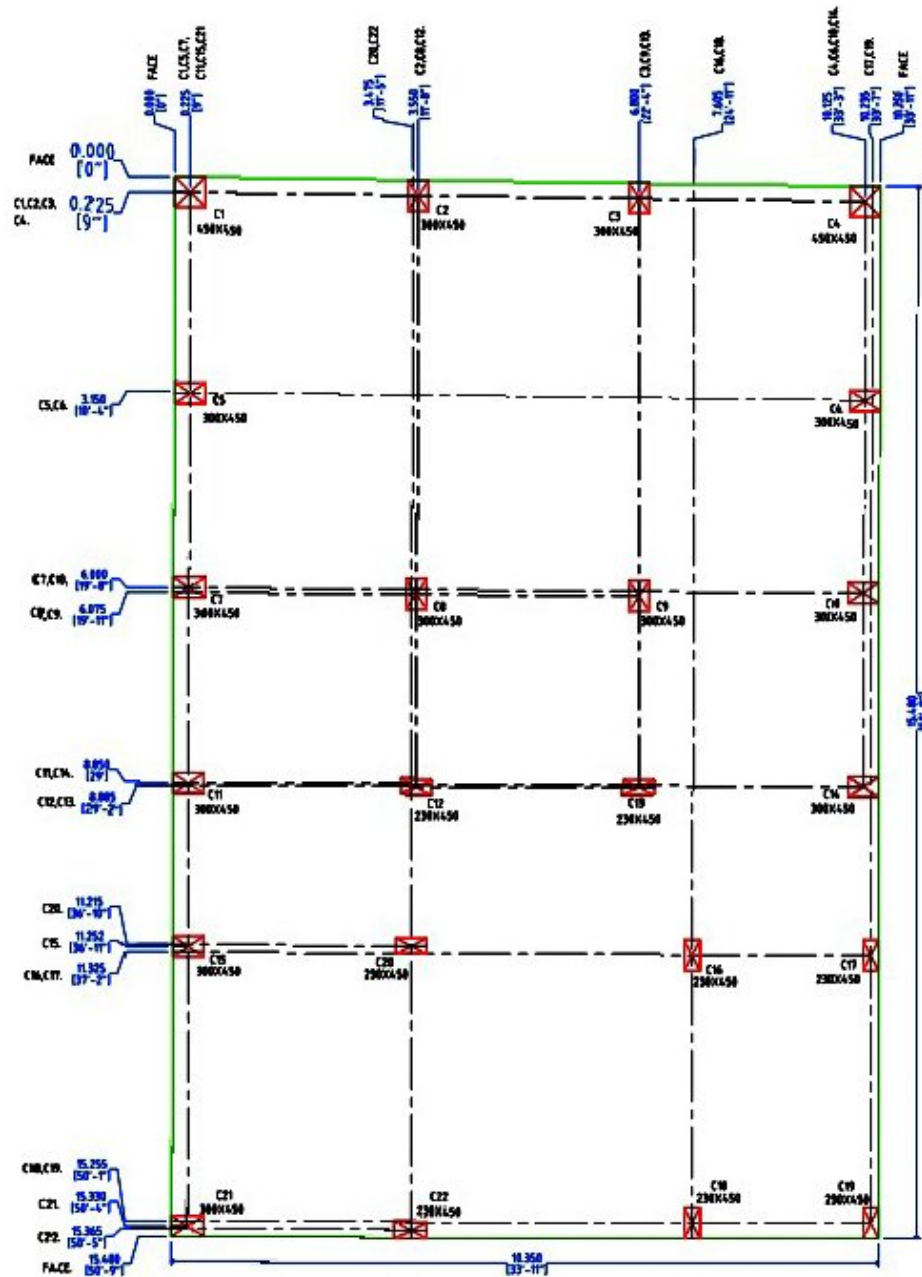


CENTER LINE PLAN FOR MASJID E SHER-E-NEPAL

NOTES :

1. DIMENSIONS AND LEVELS AS SHOWN TO BE VERIFIED AT SITE BEFORE STARTING THE WORK ON SITE.
2. NO CHANGES ON SITE OR IN DRAWINGS SHOULD BE DONE UNLESS INFORMED TO THE RESPECTIVE ARCHITECT APPOINTED ON SITE.

SR. NO.	REV. NO.	DATE	REMARK



PROJECT :

PROPOSED MASJID E SHER-E-NEPAL.

SITE LOCATION: JAYNAGAR, BHAR, IN

PROJECT DETAILS :


PROJECT NUMBER		AS_AP_09
DRAWING		AS_AP_09_RCC_CLP
DATE		06.11.2024
DRAWING TITLE		CENTER LINE PLAN
DRAWN BY	CHECKED BY	SCALE
--	--	NTS



A.S. ARCHITECTS, INTERIOR DESIGNERS & 3D STUDIO,

ADD: REHMATNAGAR, SANGAMNER,  
DIST. AHMEDNAGAR, PIN- 422605.



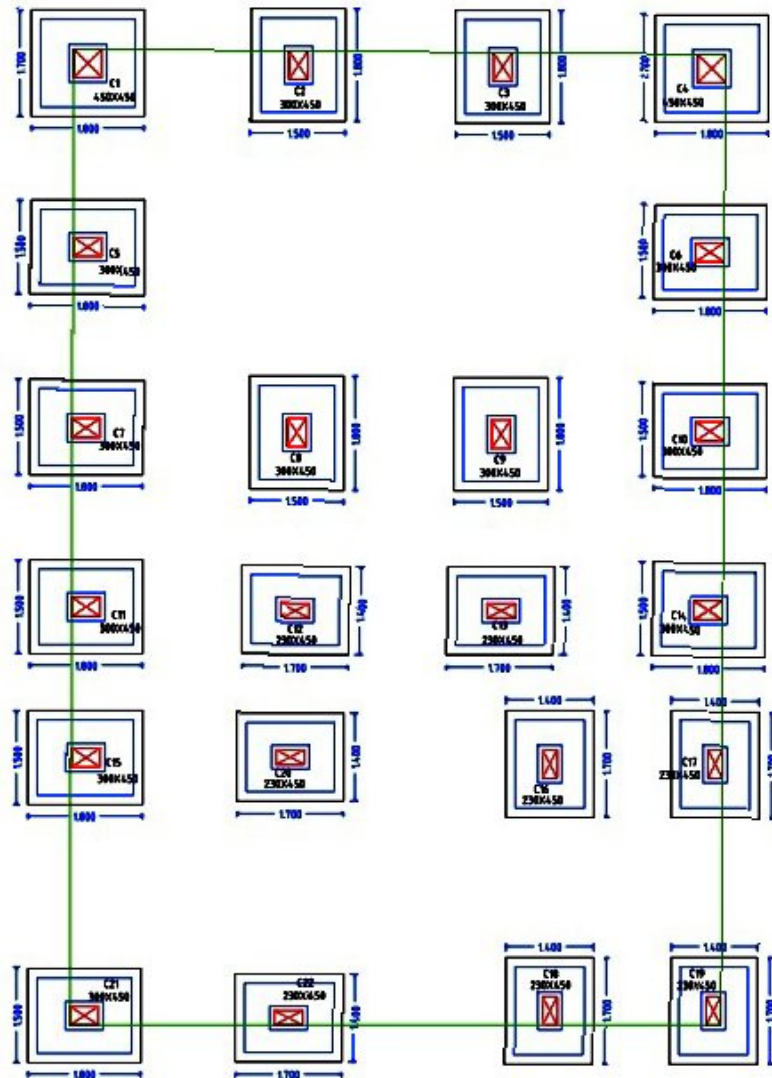

**FOUNDATION / FOOTING PLAN FOR MASJID E SHER-E-NEPAL**

**NOTES :**

1. DIMENSIONS AND LEVELS AS SHOWN TO BE VERIFIED AT SITE BEFORE STARTING THE WORK ON SITE.
2. NO CHANGES ON SITE OR IN DRAWINGS SHOULD BE DONE UNLESS INFORMED TO THE RESPECTIVE ARCHITECT APPOINTED ON SITE.

SR. NO.	REV. NO.	DATE	REMARK



**PROJECT :**

PROPOSED MASJID E SHER-E-NEPAL

SITE LOCATION: JAYNAGAR, BHAR, IN

**PROJECT DETAILS :**

PROJECT NUMBER	AS_AP_09
DRAWING	AS_AP_09_RCC_FP
DATE	06.11.2024
DRAWING TITLE	FOUNDATION PLAN
DRAWN BY	CHECKED BY
NTS	NTS



**A.S. ARCHITECTS, INTERIOR DESIGNERS & 3D STUDIO,**

ADD: REHMATNAGAR, SANGAMNER,  
DIST. AHMEDNAGAR, PIN- 422625.



<b>Name of Project- Masjid E Mohammadi, Jaynagar, Bihar.</b>
<b><i>Approximate Quantity of Material Required</i></b>

<i>Approximate Area of Work=</i>	<i>1750 Sq.ft.</i>
<i>Approximate Sq.ft. rate=</i>	<i>2000/- per Sq.ft.</i>
<i>Approximate Amount of work=</i>	<i>35,00,000/- (Thirty Five Lacs Only)</i>

<b><u>Date: 20.11.2024</u></b>
--------------------------------

<b>Sr. No.</b>	<b>Material</b>	<b>Quantity</b>	<b>Unit</b>
1	Steel (सलिया)	8	Tonnes
2	Cement (सीमेंट)	1000	Bags
3	River Sand (बालू)	50	Brass
4	Aggregates (खडी)	30	Brass
5	Bricks (ईंट)	35,000	Nos.